




Mulhern Belting, Inc
Phone: 800-253-6300
Fax: 201-337-6540
Web: <http://www.mulhernbelting.com>
Email: sales@mulhernbelting.com

Part Number: 3-1406

Description: 3 Ply Tan Rough Top x Bare

Color: Tan
Nominal OAG: 0.265" +/- .025
Recessed OAG: 0.120" +/- N/A
Plies: 3
Fabric: Polyester
Minimum Pulley Diameter: 3"
Top Surface: Hemp Impression Rough Top
Bottom Surface: Bare
Compound: SBR
Work Tension: 200 lbs. PIW
Elongation: Less than 2%
Weight P.I.W. / Ft.: .100 lbs.
Working Temperature: -20F to 250F
Joining Method: Lap Splice; Lacing

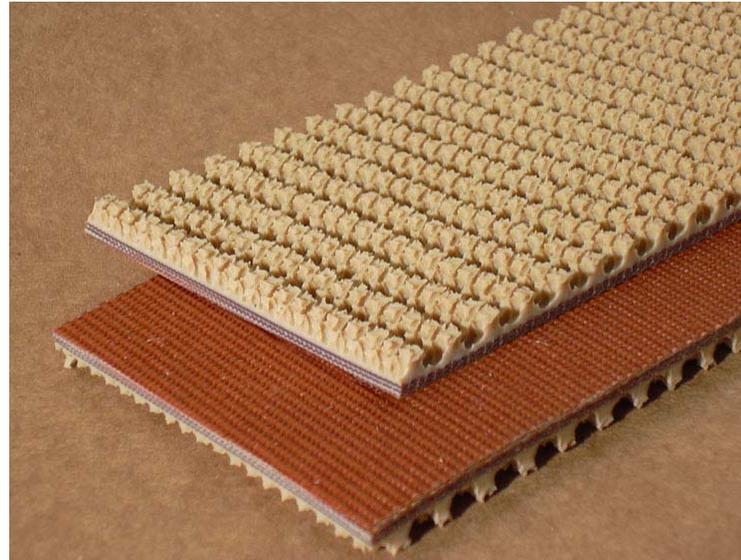

Features: 3-1406 offers one of the highest coefficients of friction for steep inclines. This belt cushions the conveyed product with a non-marking surface. NOTE--The Rough Top impression must be recessed to use the recommended lacing. Use Recessed OAG for Lacing Recommendation.

Applications: 3 Ply Tan Rough Top X Bare is popular where a little extra grip or non-marking quality is needed in an incline belt.

Additional Photos:

