




Mulhern Belting, Inc
Phone: 800-253-6300
Fax: 201-337-6540
Web: <http://www.mulhernbelting.com>
Email: sales@mulhernbelting.com

Part Number: 4-4900

Description: U2GY Mono-Stamp 12M/FU/FU

Color: Gray
Nominal OAG: 0.060" +/- .015
Plies: 2
Fabric: Monofilament
Minimum Pulley Diameter: 2"
Top Surface: Bare
Bottom Surface: Bare
Compound: Urethane
Work Tension: 143 lbs. PIW
Elongation: Less than 2%
Weight P.I.W. / Ft.: .028 lbs.
Working Temperature: -40F to 176F
Joining Method: Skived Splice; Lacing

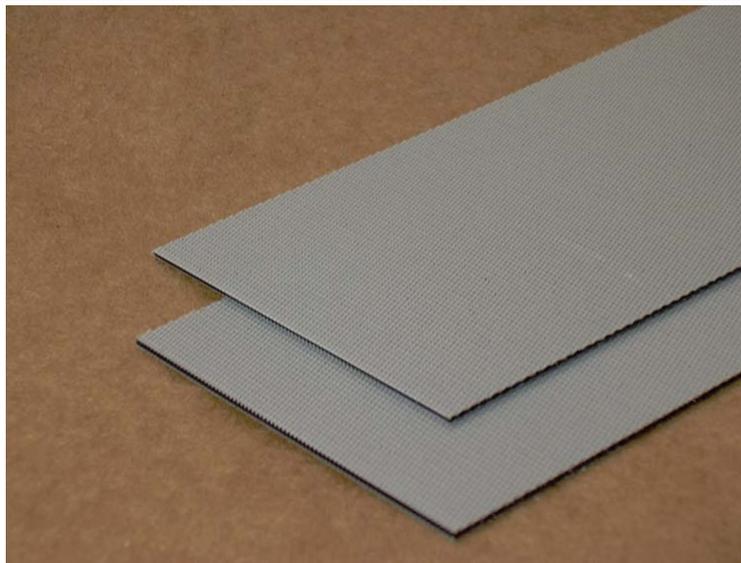

Features: 4-4900 features a urethane impregnated monofilament fabric. It has excellent abrasion and oil resistance.

Applications: U2GY Mono-Stamp 12M/FU/FU is an excellent belt for conveying metal parts such as metal stampings. This belt is used in the automotive and chemical industries.
